

DS-3000



System configuration

Hardware



The 2-channel units or 4-channel units can be combined to expand to up to a 32-channel system.

Model	Name
DS-3102	2ch main unit (2ch basic set)
DS-3104	4ch main unit (4ch basic set)
DS-0362	2ch input unit (for expansion)
DS-0364	4ch input unit (for expansion)
DS-0371	1ch signal output module (built-in)
DS-0372	2ch signal output unit

I/F(ONO-LINK3)

DS-0396 (For desktop-type PC)
*PCI Express × 1 slot



DS-0397 (For notebook-type PC)
*PC card



DS-0398 (For notebook-type PC)
*Express card



The cables are sold separately.
(1.5m / 3m / 10m / 20m)

Software



DS-2000 series (4ch to 8ch)*4)

Model	Name
DS-0221WA	General-purpose FFT analysis
DS-0222WA	Tracking analysis
DS-0223WA	1/1 and 1/3 real-time octave analysis
DS-0250WA	Throughput disk function
DS-0251A	File export function

*4) The software without "A" in the end of the model name cannot be used for the DS-3000 series.

Accessories

Model	Name
CC-0025	Soft carrying case
CC-0026	Hard carrying case
—	AC adapter *5)

*5) Required for a system of 14ch or larger.

General specifications

Number of input channels	2 to 32ch	
Input connector	BNC (voltage input / CCLD switching)	
Power supply for sensor	4 mA / 24 V	
Input voltage range	10 mVrms to 10 Vrms (7 ranges)	
Frequency range	DC to 40 kHz	
Dynamic range	110 dB	↑UP
Number of signal output channels	0 to 5ch	↑UP
Signal output FFT points	64 to 16384 points	
Real-time rate	40 kHz range, 8ch, 2048 points	↑UP
	20 kHz range, 16ch, 2048 points	↑UP
Throughput speed	40 kHz range, 16ch	↑UP
	20 kHz range, 32ch	↑UP
Rotational speed range	60 to 192,000 r/min	↑UP
	(based on maximum analysis order)	
Outer dimensions	269 mm(W) × 71 to 267 mm(H) × 217 mm(D)	
	Including a protector	
Power-supply voltage	100 to 240 VAC 15 VDC	
Power consumption	25 to 95 VA (at 15 VDC)	
Operating temperature range	0 to +40 °C (with no condensation)	
Weight	2.2 kg (with 4ch) to 8.2 kg (with 32ch)	
Cooling fan	None (natural cooling: up to 12ch)	

↑UP : Upgraded function compared to the DS-2000 series.

Operating environment

OS : Windows® XP(SP2. Net Framework 2.0 or later) / Windows® Vista(SP1) / Windows® 7 **NEW**
 CPU : Intel® Pentium® 4 / 2 GHz or more
 Memory: Required 1 GB or more
 HDD : Required 1 GB or more

Note : When the software of the DS-3000 series is installed, condition of the PC is also set up so that the DS-3000 series can be operated properly. If the settings are changed by the customer, some operation and performance are not guaranteed.
 • When condition of the PC is made into "Eco Mode" or "power-saving mode", it may become impossible to fulfill specifications, such as throughput speed.
 • The ONO-LINK II interface can also be used to connect with the DS-3000 series only when the application and driver for the DS-3000 series are installed on the PC. The application and driver for the DS-2000 are not available for the DS-3000 series. For details, please contact your nearest distributor or send an e-mail to us; overseas@onosokki.co.jp.
 • Only the 32-bit version Windows® OS is available.

●Microsoft® Windows® are registered trademarks of Microsoft Corporation in the United States and other countries.
 ●Other product names and model names are trademarks or registered trademarks of each individual company.
 The copyrights are reserved by each individual company.

*Outer appearance and specifications are subject to change without prior notice.

URL: <http://www.onosokki.co.jp/English/english.htm>
 E-mail: overseas@onosokki.co.jp

ONOSOKKI

U.S.A.
 Ono Sokki Technology Inc.
 2171 Executive Drive, Suite 400,
 Addison, IL 60101, U.S.A.
 Phone : +1-630-627-9700
 Fax : +1-630-627-0004
 E-mail : info@onosokki.net
 URL : <http://www.onosokki.net>

THAILAND
 Ono Sokki (Thailand) Co., Ltd.
 29/67 Moo 5 Tivanon Road, Pakkred,
 Nonthaburi 11120, Thailand
 Phone : +66-2-964-3884
 Fax : +66-2-964-3887
 E-mail : osth_sales@onosokki.co.jp

P.R. CHINA
 Ono Sokki Beijing Office
 Beijing Jing Guang Center 3510,
 Hu Jia Lou, Chao Yang Qu,
 Beijing 100020, P.R.China
 Phone : +86-10-6597-3113
 Fax : +86-10-6597-3114
 E-mail : onosokki@bbrn.cn

WORLDWIDE
 Ono Sokki Co., Ltd.
 3-9-3 Shin-Yokohama, Kohoku-ku,
 Yokohama 222-8507, Japan
 Phone : +81-45-476-9712
 Fax : +81-45-470-7244
 E-mail : overseas@onosokki.co.jp



DS-3000

Multi-Channel Data Station **DS series**

The next generation in signal analysis



ONOSOKKI

"Top-notch performance, top-notch function, combined with easy handling"

After thoroughly investigating the question of "What makes a measuring instrument easy to use," Ono Sokki has developed a new type of data station, the **DS-3000** that performs at overwhelming throughput speed. With specifications that surpass those of the DS-2000, this new model will significantly reduce your measurement time.



Multi-Channel Data Station
DS series

DS-3000

Speedy

Double the analyzing speed (real-time rate) *1).

- 40-kHz range FFT online analysis: up to 8ch (up to 4ch in the DS-2000)
- 20-kHz range FFT online analysis: up to 16ch (up to 8ch in the DS-2000)

Double the data recording (throughput) speed *1).

- 40-kHz range: up to 16ch (up to 8ch in the DS-2000)
- 20-kHz range: up to 32ch (up to 16ch in the DS-2000)





Small Size

More compact than the conventional model (DS-2000).



Silent Measurement

No cooling fan required (up to 12-channel). *3)
No measurement interference when placed near a quiet object.

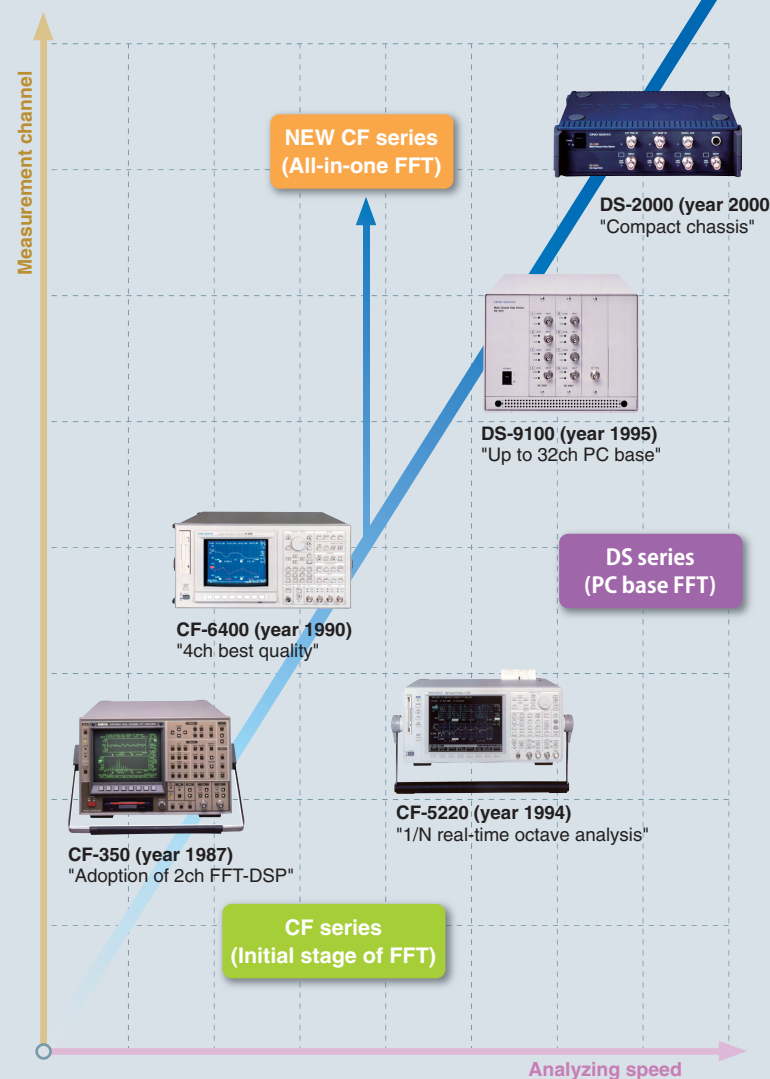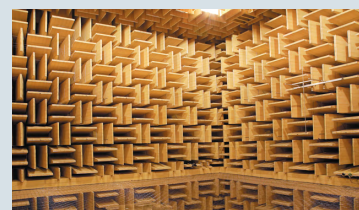

Smart Design

Universally-accepted "stylish" measuring instrument. Measurer-friendly functions are incorporated in the sophisticated body.

ONO-LINK3 connector

The larger-size connector is placed on the front panel, and robustness and simplicity of detaching are significantly increased.



Signal level LED

A line-type LED is adopted to enhance both visibility and aesthetic functionality.



BNC connector

The pitch between connectors is made broader in compact unit. This design allows JPJ connectors to be attached to all channels.



Large protector

The protector spaciously encloses the chassis and protects the unit from unexpected contingencies in the field. Easy-to-carry design is also advantageous.



Application Software

DS-2000 series


Online analysis

FFT

RTA

Tracking

Recording



*1) In comparison to Ono Sokki's DS-2000. (When connecting to the ONO-LINK3) *2) 32-channel system is approximately 5 cm thinner. *3) A cooling fan is provided on the backside of the chassis of the 14-channel system or larger.