


CF-4700A

ONOSOKKI

FFT Comparator

An FFT comparator that can measure periodically changing sounds and vibrations
Advantages in the manufacturing field

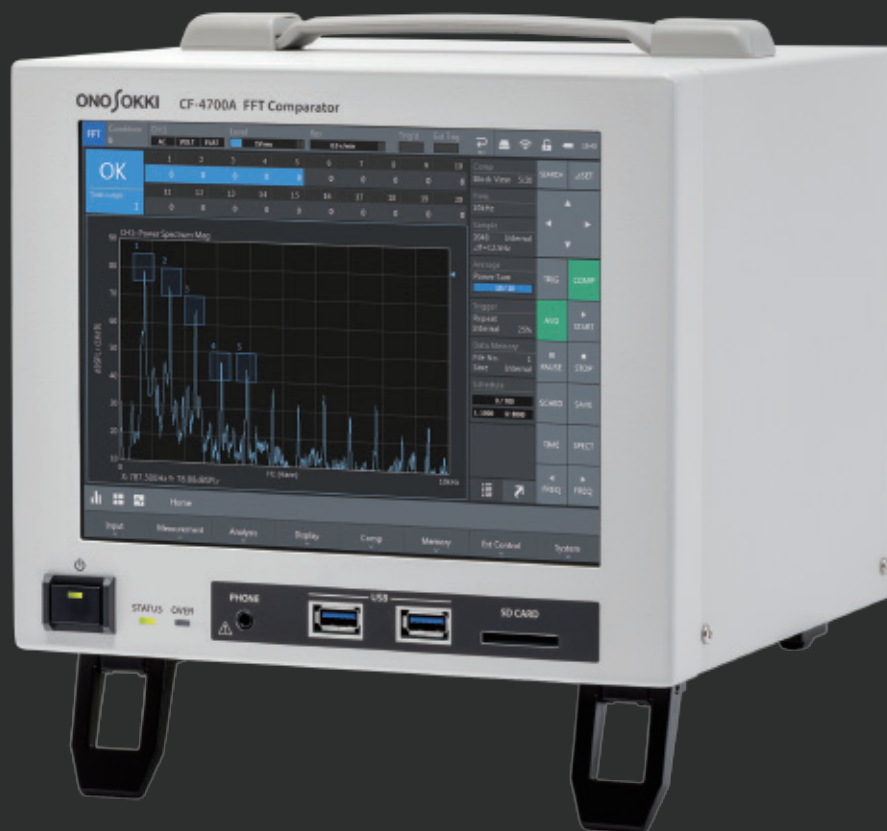

FFT Comparator CF-4700A

The CF-4700A FFT comparator is the best pass/fail judgment machine for precise quality inspection of production line by analyzing sound and vibration. Enables pass/fail judgment by extracting the problematic frequency components.



8.4-inch touch-panel color LCD

SD/SDHC/SDXC memory card slot

USB interface

Headphone output

Features 4 comparator functions


Block Comparator	Pass/fail judgment is performed from the signal level with characteristic frequency by setting a judgment block area.
Shape Comparator by waveform shape	Pass/fail judgment is performed by waveform shape. Option
Shape Comparator by tracking waveform	Pass/fail judgment by capturing level variation in specified orders while rotation speed is varied. Option
Amplitude Modulation Component Extraction Function (Bandpass Envelop Monitoring Function)	Pass/fail judgment is made by extracting fluctuation amount of vibration (chatter vibration etc.) and sounds caused by periodic fluctuations (roaring sound etc.). Option

A variety of user-friendly functions

- **Judgment Criterion Assist Function** that sets the judgment block area based on the difference between frequency characteristics of good and defective products
- Accepts **TEDS sensor** that automatically perform unit calibration. (Accelerometer and microphone that conform to IEEE 1451.4 ver.0.9 and ver.1.0)
- **Cable Disconnection Detecting Function** that automatically detects cable disconnection and connector failure when using a constant current drive (CCLD) type sensor
- Stores measurement conditions and measurement data on an **USB memory and SD / SDHC / SDXC memory card**.
- **Monitor Function** that allows you to listen to and confirm characteristic frequency focused on. **Option**
- **Power Source Backup Function** prevents loss of measurement data in case of a main power down, and enables the CF-4700A is turned ON/OFF from the control panel of equipment that supplies power to the CF-4700A. **Option**

Functions

Judging by frequency level

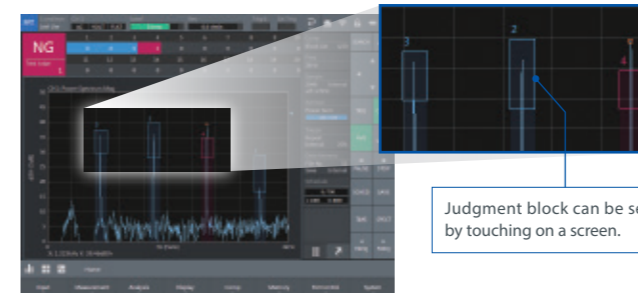

The Block Comparator Function makes pass/fail judgments using a block area which is set in a certain frequency and level range. The judgment is made in terms of whether a peak value or level of a target signal coincides with the conditions which are set in advance or not.

- 6 kinds of judgment methods (level, peak level, peak max., inside max, partial overall, and areal content rate)
- Two methods for setting judgment block (drag operation at a touch of a screen or direct value entering on a list screen)
- Easy block setting by judgment assist function that reads differences in levels of sounds or vibrations from both passed and failed measurement data files respectively.


Related function | **Block Comparator Function** Standard | **Judgment Criterion Assist Function** Standard

Judging by the signal amount of fluctuation in a specific frequency band

The Amplitude Modulation Component Extraction Function (CF-0473A) is a preprocessing function to extract the signal amount of fluctuation in a specific frequency band.

This function is effective for making judgments on abnormal sound or vibration stemming from fluctuations in signal size, and can be used as a preprocessing function for making pass/fail judgments on fuzzy creaks or chattering by a motor-driven device in operation.

This function (CF-0473A) also enables measurements such as 'monitoring of bearing vibrations' using the band pass filter and envelope functions, as well as 'auditory inspections of vibrations through headphones' using the monitor function which amplifies inaudible vibrations to audible sounds.

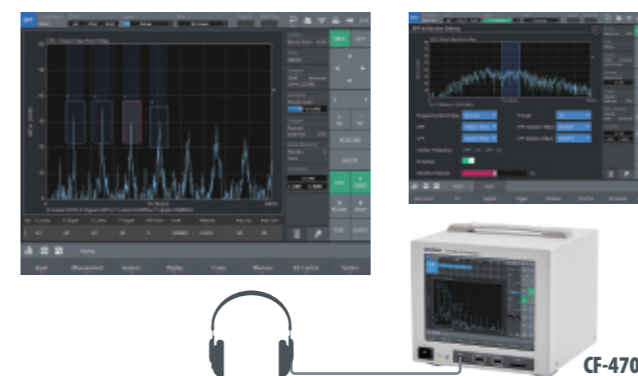


Related function | **CF-0473A Amplitude Modulation Component Extraction Function** Option

Judging by shape of waveform



The Shape Comparator Function (CF-0472) makes pass/fail judgments by waveform shape. By setting a judgment line, this function enables pass/fail judgments on subtle variations in a time waveform or on differences in spectral shapes. In order to avoid misjudgment due to instantaneous noises in a time waveform, if the number of data exceeding the judgment level is equal to or smaller than a set value, they are assumed to be noises and can be excluded from the target data for the judgment.

By using with the CF-0471, it extracts the vibration and noise components which follow rotational speed and are caused by rotation and makes pass/fail judgment of the equipment based on the level or its fluctuation.

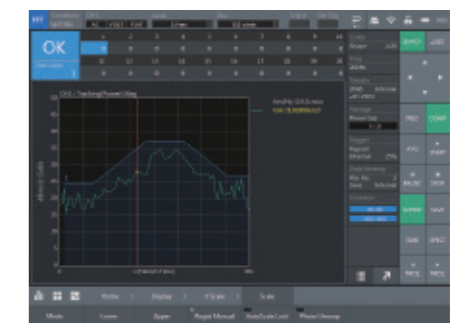

Related function | **CF-0472 Shape Comparator Function** Option | **CF-0471 Tracking Function** Option

Effective countermeasure against accidental power failure

At the production site, an instantaneous power failure or sudden large drop in the voltage of the production line's main power could occur accidentally. The Power Source Backup Function (CF-0478A) deactivates the CF-4700A in a normal manner in the event of a main power down of the production line. There is no need to prepare an uninterruptible power supply separately.

Moreover, presetting of startup conditions helps a smooth restart at the time of power restoration.

This function also allows for centralized power control of the production line. In other words, the CF-4700A can be turned on or off by mere operation of the control panel of the production line's main power.




Related function | **CF-0478A Power Source Backup Function** Option

Application Examples


Unusual noise evaluation of door mirror operation

Unusual fuzzy noises having periodic fluctuation components may be generated while door opening and closing if a drive motor of door mirror has irregularity in the rotation. The Amplitude Modulation Component Extraction Function (CF-0473A) is helpful for the evaluation of those sounds. The fluctuation amount of periodic fluctuation detected by microphones is the judgment index whether it contains abnormal sound or not. Using the CF-0473A may be possible to evaluate on sounds that cannot be judged simply by the sound level.

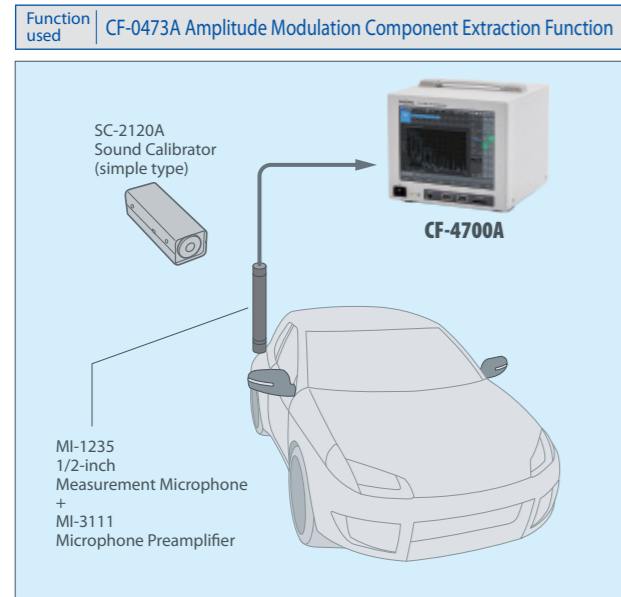


Abnormal vibration diagnosis of bearings

If the bearings are damaged, abnormal vibrations will occur. The Amplitude Modulation Component Extraction Function (CF-0473A) is suitable for judging the maintenance timing of bearings. Apply a filter (bandpass filter) to the frequency band of vibration caused by bearing damage, and the basic frequency corresponding to the damaged part is analyzed by the envelope function. Monitor the condition of the bearing focusing on the amplitude of the frequency, and then the maintenance timing is judged. You can also set the filter while listening to the sound using the headphone output.

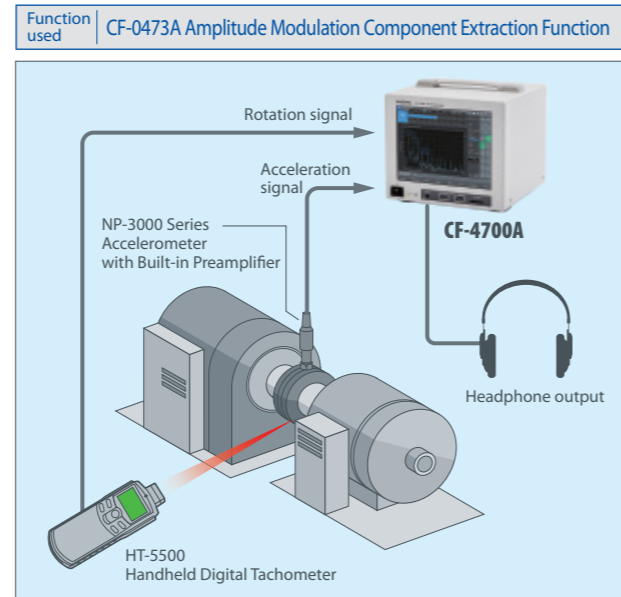


Inspection of abnormal sound generated from a power supply board

Sometimes power frequency sound and high frequency sound are generated from electronic parts on a power supply board. The Block comparator of CF-4700A can be used for the pass/fail judgment of those electronic parts using the block comparator function. In this example, abnormal sound coming from a power board is measured by microphone in an anechoic box to avoid influence of background noise. Perform the frequency analysis with the CF-4700A, and then pass/fail judgment is made to that sound by block comparator with areal content rate by setting the judgment block including the frequency caused the abnormal noise.

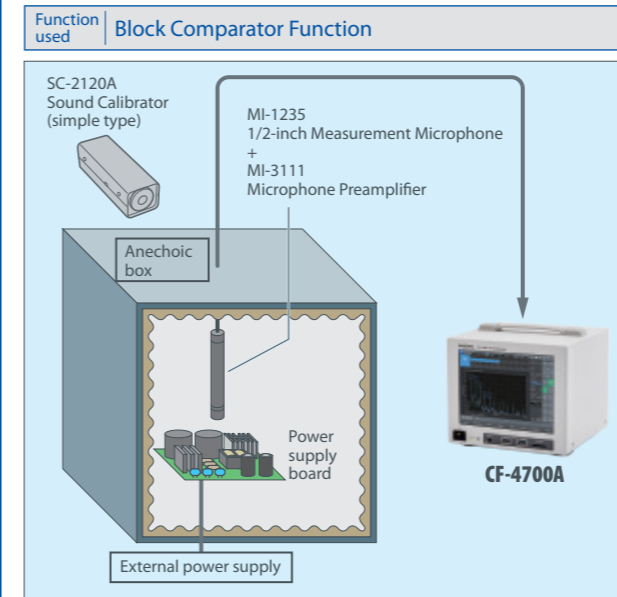


Inspection of a wire harness device for automobile

A wire harness device inside a sliding door of automobile sometimes makes abnormal sound while the door is in motion. To check the harness sound, block comparator function is effective. Measure and output the winding sound of wire harness while driving a motor at a sound insulating box with a sound level meter. The CF-4700A performs frequency analysis of that sound and makes pass/fail judgment using the partial overall level in a specific frequency band.

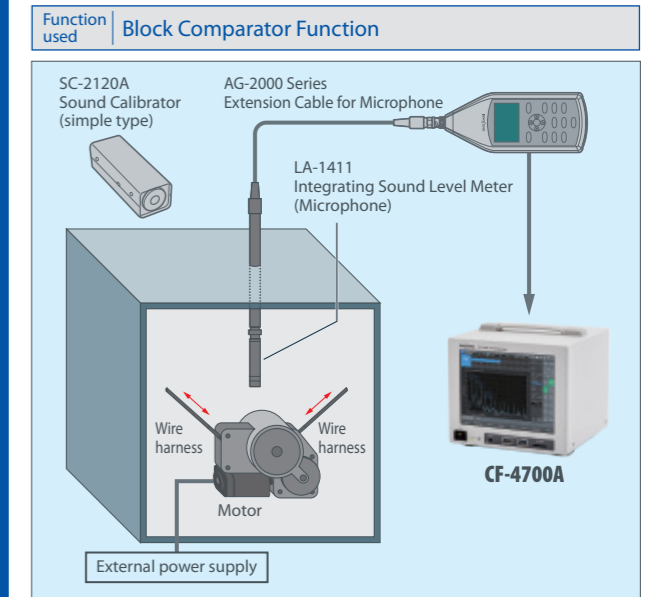


Inspection of transmission noise by tracking analysis

The CF-4700A can perform quality control of transmission by tracking analysis of vibration signal from a transmission. In this example, the CF-4700A performs tracking analysis with rotation pulses from a rotation controller in a transmission tester. Rotation tracking analysis of meshing order is performed using vibration generated when its rotation speed is varied from idling to maximum. Pass/ fail judgment of the transmission is made by setting a judgment line along the tracking data.

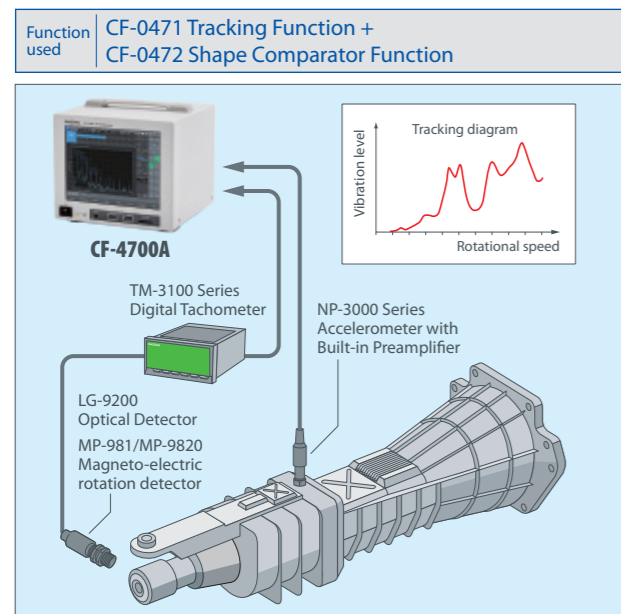


Inspection of a metal part by hammering sound


The CF-0472 is helpful to make pass/fail judgment of metal parts. Frequency spectrum of a hammering sound of a metal part (a casting part) which will change with cracks or fractures is used for the inspection. In this example, the metal part suspended in free vibration is hit with a hammer, and its distribution sound is recorded with a sound level meter. FFT analysis is performed on CF-4700A to be able to see the difference in power spectrum shape between good and defective products. By reference to the shape, set the Shape Comparator to make pass/fail judgment.

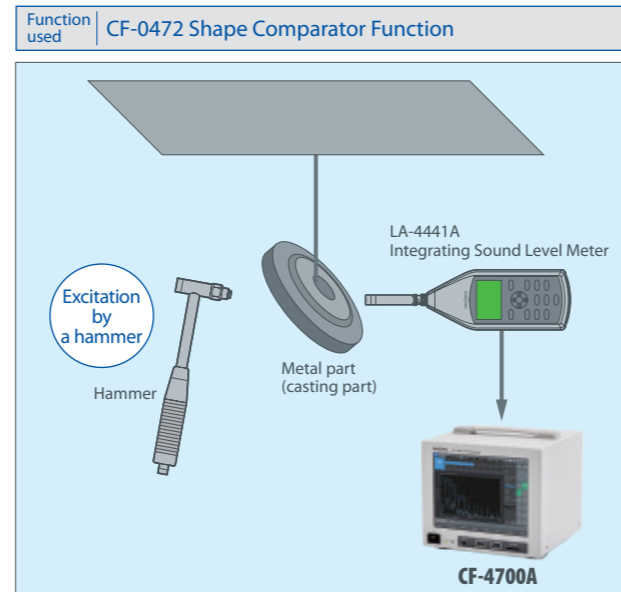

Imbalance inspection of a turbo fan

To inspect the imbalance of turbo fan, block comparator function is helpful. Using the vibration of turbo fan which increases when it has imbalance, find the frequency band and judgment block to be set. The CF-4700A can make pass/fail judgment by setting the "peak max" judgment block. When there is MAX value of waveform inside the block area, it means "Pass". If not, it means "Fail".

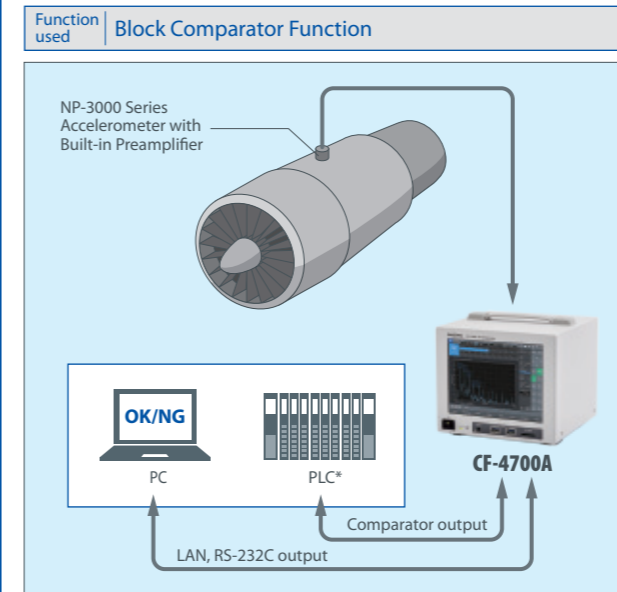

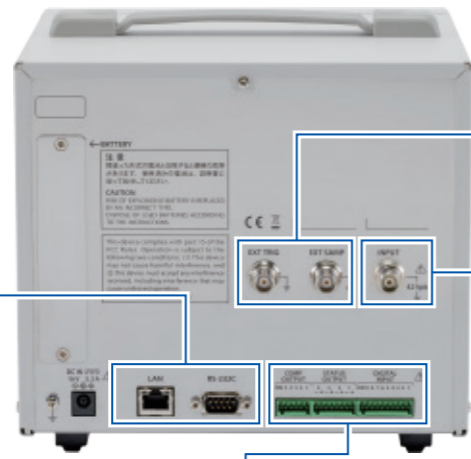

Remotely controllable from a PC etc via LAN and RS-232C interfaces.

EXT TRIG : External trigger input
EXT SAMP : External sample input
(Available when the CF-0471 Tracking Function is installed)


INPUT : Signal input connector (isolated)
TEDS available. Cable disconnection detecting function is also available when a constant current line drive (CCLD) type sensor is connected.


Digital I/O

Specifications	Recommended Connection Circuit
<p>● DIGITAL INPUT The following functions are assigned to the connector.</p> <ul style="list-style-type: none"> Control by command assignment (max. 9 terminals) Panel condition selection (4 terminals) Judgment block changeover (4 terminals) 	<p>CF-4700A side</p> <p>External device side (example)</p>
<p>● STATUS OUTPUT Contact terminal to output 4 kinds of statuses. (Comp-BUSY, OK, NG, ERROR)</p>	
<p>● COMP OUTPUT Contact terminal that selects 5 judgment setups from 20 setups, and outputs the results.</p>	

1. Input Section																																														
<table border="1"> <tr> <th colspan="2">General input</th> </tr> <tr> <td>Number of input channels</td> <td>1 channel</td> </tr> <tr> <td>Input connector type</td> <td>C02 type (BNC)</td> </tr> <tr> <td>Input type</td> <td>Single-ended, isolated</td> </tr> <tr> <td>Input impedance</td> <td>1 MΩ±0.5 %, 100 pF or less</td> </tr> <tr> <td>Input coupling</td> <td>DC or AC (-3 dB±0.3 dB at 0.5 Hz)</td> </tr> <tr> <td>Power supply current for sensor (CCLD)</td> <td>+24 V, 4 mA</td> </tr> <tr> <td colspan="2">TEDS function*1</td> </tr> <tr> <td></td> <td>Accepts accelerometer and microphone conforming to IEEE 1451.4 ver.0.9, ver.1.0.</td> </tr> <tr> <td></td> <td>TEDS ver.0.9 (0: accelerometer, 12: microphone)</td> </tr> <tr> <td></td> <td>TEDS ver.1.0 (25: accelerometer, 27: microphone)</td> </tr> <tr> <td>Maximum input voltage</td> <td>30 Vrms (42.4 Vpeak)</td> </tr> <tr> <td>Absolute maximum input voltage</td> <td>70 Vrms AC 1 minute (50 Hz)</td> </tr> <tr> <td>Input voltage range</td> <td>1 Vrms, 31.62 Vrms (2 ranges)</td> </tr> <tr> <td>DC offset</td> <td>-60 dB full scale or less (When auto zero is on and DC coupling)</td> </tr> <tr> <td>Amplitude flatness</td> <td>+0.1 dB</td> </tr> <tr> <td>Harmonic distortion</td> <td>-90 dB or less (Standard, when optional filter is off)</td> </tr> <tr> <td>Full-scale accuracy</td> <td>+0.1 dB or less (At 1 kHz)</td> </tr> <tr> <td>Aliasing</td> <td>-90 dB or less</td> </tr> <tr> <td>Amplitude linearity</td> <td>+0.0015 % or less (At full scale)</td> </tr> <tr> <td>Input level monitor</td> <td>Lights up in red LED at excessive input. (Lights up in red for 95% of input voltage range)</td> </tr> <tr> <td>Dynamic range</td> <td>110 dB or more</td> </tr> <tr> <td>A/D converter</td> <td>24 bits type ΔΣ</td> </tr> </table>	General input		Number of input channels	1 channel	Input connector type	C02 type (BNC)	Input type	Single-ended, isolated	Input impedance	1 MΩ±0.5 %, 100 pF or less	Input coupling	DC or AC (-3 dB±0.3 dB at 0.5 Hz)	Power supply current for sensor (CCLD)	+24 V, 4 mA	TEDS function*1			Accepts accelerometer and microphone conforming to IEEE 1451.4 ver.0.9, ver.1.0.		TEDS ver.0.9 (0: accelerometer, 12: microphone)		TEDS ver.1.0 (25: accelerometer, 27: microphone)	Maximum input voltage	30 Vrms (42.4 Vpeak)	Absolute maximum input voltage	70 Vrms AC 1 minute (50 Hz)	Input voltage range	1 Vrms, 31.62 Vrms (2 ranges)	DC offset	-60 dB full scale or less (When auto zero is on and DC coupling)	Amplitude flatness	+0.1 dB	Harmonic distortion	-90 dB or less (Standard, when optional filter is off)	Full-scale accuracy	+0.1 dB or less (At 1 kHz)	Aliasing	-90 dB or less	Amplitude linearity	+0.0015 % or less (At full scale)	Input level monitor	Lights up in red LED at excessive input. (Lights up in red for 95% of input voltage range)	Dynamic range	110 dB or more	A/D converter	24 bits type ΔΣ
General input																																														
Number of input channels	1 channel																																													
Input connector type	C02 type (BNC)																																													
Input type	Single-ended, isolated																																													
Input impedance	1 MΩ±0.5 %, 100 pF or less																																													
Input coupling	DC or AC (-3 dB±0.3 dB at 0.5 Hz)																																													
Power supply current for sensor (CCLD)	+24 V, 4 mA																																													
TEDS function*1																																														
	Accepts accelerometer and microphone conforming to IEEE 1451.4 ver.0.9, ver.1.0.																																													
	TEDS ver.0.9 (0: accelerometer, 12: microphone)																																													
	TEDS ver.1.0 (25: accelerometer, 27: microphone)																																													
Maximum input voltage	30 Vrms (42.4 Vpeak)																																													
Absolute maximum input voltage	70 Vrms AC 1 minute (50 Hz)																																													
Input voltage range	1 Vrms, 31.62 Vrms (2 ranges)																																													
DC offset	-60 dB full scale or less (When auto zero is on and DC coupling)																																													
Amplitude flatness	+0.1 dB																																													
Harmonic distortion	-90 dB or less (Standard, when optional filter is off)																																													
Full-scale accuracy	+0.1 dB or less (At 1 kHz)																																													
Aliasing	-90 dB or less																																													
Amplitude linearity	+0.0015 % or less (At full scale)																																													
Input level monitor	Lights up in red LED at excessive input. (Lights up in red for 95% of input voltage range)																																													
Dynamic range	110 dB or more																																													
A/D converter	24 bits type ΔΣ																																													
<table border="1"> <tr> <th colspan="2">External trigger input</th> </tr> <tr> <td>Input connector type</td> <td>C02 type (BNC)</td> </tr> <tr> <td>Input voltage range</td> <td>±12 V</td> </tr> <tr> <td>Input impedance</td> <td>100 kΩ</td> </tr> <tr> <td>Input coupling</td> <td>DC or AC</td> </tr> <tr> <td>Input frequency range</td> <td>0 to 300 kHz (out-of-band filter: 330 kHz -3 dB)</td> </tr> </table>	External trigger input		Input connector type	C02 type (BNC)	Input voltage range	±12 V	Input impedance	100 kΩ	Input coupling	DC or AC	Input frequency range	0 to 300 kHz (out-of-band filter: 330 kHz -3 dB)																																		
External trigger input																																														
Input connector type	C02 type (BNC)																																													
Input voltage range	±12 V																																													
Input impedance	100 kΩ																																													
Input coupling	DC or AC																																													
Input frequency range	0 to 300 kHz (out-of-band filter: 330 kHz -3 dB)																																													
<table border="1"> <tr> <th colspan="2">External sample input</th> </tr> <tr> <td>Input connector type</td> <td>C02 type (BNC)</td> </tr> <tr> <td>Input voltage range</td> <td>±12 V</td> </tr> <tr> <td>Input impedance</td> <td>100 kΩ</td> </tr> <tr> <td>Input coupling</td> <td>DC or AC</td> </tr> <tr> <td>Input frequency range</td> <td>0 to 300 kHz (out-of-band filter: 330 kHz -3 dB)</td> </tr> </table>	External sample input		Input connector type	C02 type (BNC)	Input voltage range	±12 V	Input impedance	100 kΩ	Input coupling	DC or AC	Input frequency range	0 to 300 kHz (out-of-band filter: 330 kHz -3 dB)																																		
External sample input																																														
Input connector type	C02 type (BNC)																																													
Input voltage range	±12 V																																													
Input impedance	100 kΩ																																													
Input coupling	DC or AC																																													
Input frequency range	0 to 300 kHz (out-of-band filter: 330 kHz -3 dB)																																													
<table border="1"> <tr> <th colspan="2">Analog filter</th> </tr> <tr> <td>High-pass filter (HPF)</td> <td>Cut-off frequency (Selectable) 1, 3, 10 Hz 10 Hz conforms to vibration severity standards filter. (3 order Butterworth, ISO 2954)</td> </tr> <tr> <td>Low-pass filter (LPF)</td> <td>Cut-off frequency (Selectable) 1k, 10 kHz 1 kHz conforms to vibration severity standards filter. (3 order Butterworth, ISO 2954)</td> </tr> </table>	Analog filter		High-pass filter (HPF)	Cut-off frequency (Selectable) 1, 3, 10 Hz 10 Hz conforms to vibration severity standards filter. (3 order Butterworth, ISO 2954)	Low-pass filter (LPF)	Cut-off frequency (Selectable) 1k, 10 kHz 1 kHz conforms to vibration severity standards filter. (3 order Butterworth, ISO 2954)																																								
Analog filter																																														
High-pass filter (HPF)	Cut-off frequency (Selectable) 1, 3, 10 Hz 10 Hz conforms to vibration severity standards filter. (3 order Butterworth, ISO 2954)																																													
Low-pass filter (LPF)	Cut-off frequency (Selectable) 1k, 10 kHz 1 kHz conforms to vibration severity standards filter. (3 order Butterworth, ISO 2954)																																													
<table border="1"> <tr> <th colspan="2">Digital filter</th> </tr> <tr> <td>Frequency weighting filter</td> <td>A, C (Conforms to IEC 61672-1:2013 Class 1, ANSI S1.4-2014/Part 1 Class 1, JIS C 1509-1:2017 Class 1 (Compatible in terms of the filter shape))</td> </tr> </table>	Digital filter		Frequency weighting filter	A, C (Conforms to IEC 61672-1:2013 Class 1, ANSI S1.4-2014/Part 1 Class 1, JIS C 1509-1:2017 Class 1 (Compatible in terms of the filter shape))																																										
Digital filter																																														
Frequency weighting filter	A, C (Conforms to IEC 61672-1:2013 Class 1, ANSI S1.4-2014/Part 1 Class 1, JIS C 1509-1:2017 Class 1 (Compatible in terms of the filter shape))																																													
<p>2. Display</p> <table border="1"> <tr> <td>Size</td> <td>8.4-inch</td> </tr> <tr> <td>Resolution</td> <td>800 × 600**</td> </tr> <tr> <td>Method</td> <td>TFT color LCD with resistive film type touch panel</td> </tr> <tr> <td>Brightness adjustment</td> <td>ON/OFF 2 levels</td> </tr> <tr> <td>Lighting (backlight)</td> <td>LED</td> </tr> </table>	Size	8.4-inch	Resolution	800 × 600**	Method	TFT color LCD with resistive film type touch panel	Brightness adjustment	ON/OFF 2 levels	Lighting (backlight)	LED																																				
Size	8.4-inch																																													
Resolution	800 × 600**																																													
Method	TFT color LCD with resistive film type touch panel																																													
Brightness adjustment	ON/OFF 2 levels																																													
Lighting (backlight)	LED																																													
<p>3. Analysis Section</p> <table border="1"> <tr> <td>Frequency range</td> <td>1 Hz to 40 kHz</td> </tr> <tr> <td>Number of sampling points/analysis points</td> <td>256/100, 512/200, 1024/400, 2048/800, 4096/1600, 8192/3200, 16384/6400</td> </tr> <tr> <td>Real-time analysis</td> <td>40 kHz (16384 points or less, at internal sampling)</td> </tr> <tr> <td>Overlap processing</td> <td>MAX, 75 %, 66.7 %, 50 %, 25 %, 0 %, optional setup</td> </tr> <tr> <td>Window function</td> <td>Rectangular, Hanning, flat-top</td> </tr> <tr> <td>Time waveform processing function</td> <td>First and second order differentials, single and double integrals</td> </tr> <tr> <td>FFT calculation</td> <td>Absolute value conversion, DC cancel, trend elimination, smoothing</td> </tr> <tr> <td></td> <td>32-bit floating point (IEEE single-precision format)</td> </tr> </table>	Frequency range	1 Hz to 40 kHz	Number of sampling points/analysis points	256/100, 512/200, 1024/400, 2048/800, 4096/1600, 8192/3200, 16384/6400	Real-time analysis	40 kHz (16384 points or less, at internal sampling)	Overlap processing	MAX, 75 %, 66.7 %, 50 %, 25 %, 0 %, optional setup	Window function	Rectangular, Hanning, flat-top	Time waveform processing function	First and second order differentials, single and double integrals	FFT calculation	Absolute value conversion, DC cancel, trend elimination, smoothing		32-bit floating point (IEEE single-precision format)																														
Frequency range	1 Hz to 40 kHz																																													
Number of sampling points/analysis points	256/100, 512/200, 1024/400, 2048/800, 4096/1600, 8192/3200, 16384/6400																																													
Real-time analysis	40 kHz (16384 points or less, at internal sampling)																																													
Overlap processing	MAX, 75 %, 66.7 %, 50 %, 25 %, 0 %, optional setup																																													
Window function	Rectangular, Hanning, flat-top																																													
Time waveform processing function	First and second order differentials, single and double integrals																																													
FFT calculation	Absolute value conversion, DC cancel, trend elimination, smoothing																																													
	32-bit floating point (IEEE single-precision format)																																													
<table border="1"> <tr> <th colspan="2">Trigger function</th> </tr> <tr> <td>Trigger level</td> <td>-99 to 99 (Unit: %) Default value: 25 %</td> </tr> <tr> <td>Hysteresis level</td> <td>0 to 99 (Unit: %) Default value: 2 %</td> </tr> <tr> <td>Position</td> <td>±8191</td> </tr> <tr> <td>Trigger mode</td> <td>Free, repeat, single, one-shot</td> </tr> <tr> <td>Slope</td> <td>+ , - , ±</td> </tr> <tr> <td>Trigger source</td> <td>CH1, external trigger input</td> </tr> </table>	Trigger function		Trigger level	-99 to 99 (Unit: %) Default value: 25 %	Hysteresis level	0 to 99 (Unit: %) Default value: 2 %	Position	±8191	Trigger mode	Free, repeat, single, one-shot	Slope	+ , - , ±	Trigger source	CH1, external trigger input																																
Trigger function																																														
Trigger level	-99 to 99 (Unit: %) Default value: 25 %																																													
Hysteresis level	0 to 99 (Unit: %) Default value: 2 %																																													
Position	±8191																																													
Trigger mode	Free, repeat, single, one-shot																																													
Slope	+ , - , ±																																													
Trigger source	CH1, external trigger input																																													
<table border="1"> <tr> <th colspan="2">Averaging function</th> </tr> <tr> <td>Number of averaging setup</td> <td>1 to 65535 times</td> </tr> <tr> <td>Averaging setup time</td> <td>0.1 to 999.9 seconds (Interval: 0.1 second)</td> </tr> <tr> <td>Time domain</td> <td>Arithmetic mean, exponential average</td> </tr> <tr> <td>Frequency domain</td> <td>Arithmetic mean, exponential average, peak hold, max overall</td> </tr> <tr> <td>Amplitude domain</td> <td>Histogram addition average</td> </tr> <tr> <td>Averaging control function</td> <td>A/D over cancel</td> </tr> </table>	Averaging function		Number of averaging setup	1 to 65535 times	Averaging setup time	0.1 to 999.9 seconds (Interval: 0.1 second)	Time domain	Arithmetic mean, exponential average	Frequency domain	Arithmetic mean, exponential average, peak hold, max overall	Amplitude domain	Histogram addition average	Averaging control function	A/D over cancel																																
Averaging function																																														
Number of averaging setup	1 to 65535 times																																													
Averaging setup time	0.1 to 999.9 seconds (Interval: 0.1 second)																																													
Time domain	Arithmetic mean, exponential average																																													
Frequency domain	Arithmetic mean, exponential average, peak hold, max overall																																													
Amplitude domain	Histogram addition average																																													
Averaging control function	A/D over cancel																																													
<table border="1"> <tr> <th colspan="2">Processing Functions</th> </tr> <tr> <td>Time domain</td> <td>Time waveform</td> </tr> <tr> <td>Frequency domain</td> <td>Power spectrum, Fourier spectrum, 1/1 octave (bundled), 1/3 octave (bundled)</td> </tr> <tr> <td>Amplitude domain</td> <td>Amplitude probability density function, amplitude probability distribution function</td> </tr> </table>	Processing Functions		Time domain	Time waveform	Frequency domain	Power spectrum, Fourier spectrum, 1/1 octave (bundled), 1/3 octave (bundled)	Amplitude domain	Amplitude probability density function, amplitude probability distribution function																																						
Processing Functions																																														
Time domain	Time waveform																																													
Frequency domain	Power spectrum, Fourier spectrum, 1/1 octave (bundled), 1/3 octave (bundled)																																													
Amplitude domain	Amplitude probability density function, amplitude probability distribution function																																													
<p>4. Comparator Function</p> <table border="1"> <tr> <td>Judgment mode</td> <td>Continuous mode, single mode</td> </tr> <tr> <td>Judgment result output</td> <td>Total judgment result, individual judgment result of up to 5 specified blocks or shapes</td> </tr> <tr> <td>Automatic data storage</td> <td>Either NG or all measurement results</td> </tr> <tr> <td>Timer function</td> <td>Start delay time setting, judgment execution time setting</td> </tr> <tr> <td></td> <td>0 to 255 seconds (Interval: 1 second)</td> </tr> </table>	Judgment mode	Continuous mode, single mode	Judgment result output	Total judgment result, individual judgment result of up to 5 specified blocks or shapes	Automatic data storage	Either NG or all measurement results	Timer function	Start delay time setting, judgment execution time setting		0 to 255 seconds (Interval: 1 second)																																				
Judgment mode	Continuous mode, single mode																																													
Judgment result output	Total judgment result, individual judgment result of up to 5 specified blocks or shapes																																													
Automatic data storage	Either NG or all measurement results																																													
Timer function	Start delay time setting, judgment execution time setting																																													
	0 to 255 seconds (Interval: 1 second)																																													
<table border="1"> <tr> <th colspan="2">Block mode</th> </tr> <tr> <td>Target waveform</td> <td>Power spectrum, 1/1 octave (bundled), 1/3 octave (bundled), order spectrum</td> </tr> <tr> <td>Maximum number of setup blocks</td> <td>20 blocks</td> </tr> <tr> <td>Judgment method</td> <td>Level, peak level, peak max (maximum value), inside max, partial overall, areal content rate (Judgment method can be specified for each block.)</td> </tr> <tr> <td>Judgment criterion</td> <td>NG for whole block, 1 block</td> </tr> </table>	Block mode		Target waveform	Power spectrum, 1/1 octave (bundled), 1/3 octave (bundled), order spectrum	Maximum number of setup blocks	20 blocks	Judgment method	Level, peak level, peak max (maximum value), inside max, partial overall, areal content rate (Judgment method can be specified for each block.)	Judgment criterion	NG for whole block, 1 block																																				
Block mode																																														
Target waveform	Power spectrum, 1/1 octave (bundled), 1/3 octave (bundled), order spectrum																																													
Maximum number of setup blocks	20 blocks																																													
Judgment method	Level, peak level, peak max (maximum value), inside max, partial overall, areal content rate (Judgment method can be specified for each block.)																																													
Judgment criterion	NG for whole block, 1 block																																													
<table border="1"> <tr> <th colspan="2">Shape mode (CF-0472 option)</th> </tr> <tr> <td>Target waveform</td> <td>Time waveform, power spectrum, 1/1 octave (bundled), 1/3 octave (bundled), order spectrum, tracking diagram</td> </tr> <tr> <td>Maximum number of setting shape lines</td> <td>20 lines</td> </tr> <tr> <td>Judgment criterion</td> <td>Specified area, specified level</td> </tr> </table>	Shape mode (CF-0472 option)		Target waveform	Time waveform, power spectrum, 1/1 octave (bundled), 1/3 octave (bundled), order spectrum, tracking diagram	Maximum number of setting shape lines	20 lines	Judgment criterion	Specified area, specified level																																						
Shape mode (CF-0472 option)																																														
Target waveform	Time waveform, power spectrum, 1/1 octave (bundled), 1/3 octave (bundled), order spectrum, tracking diagram																																													
Maximum number of setting shape lines	20 lines																																													
Judgment criterion	Specified area, specified level																																													
<p>5. Memory Function</p> <table border="1"> <tr> <td>Recording device</td> <td>Selectable from internal storage of main unit, USB memory or SD card</td> </tr> <tr> <td>Data file</td> <td>Number of storable data: 9990 (max.) DAT, TXT, BMP, TRC (Data can be saved simultaneously in four formats. (Data storage in TXT, BMP, and TRC formats can be selected optionally))</td> </tr> <tr> <td>Panel condition memory</td> <td>Memorizes and recalls measurement conditions. (50 types max.)</td> </tr> </table>	Recording device	Selectable from internal storage of main unit, USB memory or SD card	Data file	Number of storable data: 9990 (max.) DAT, TXT, BMP, TRC (Data can be saved simultaneously in four formats. (Data storage in TXT, BMP, and TRC formats can be selected optionally))	Panel condition memory	Memorizes and recalls measurement conditions. (50 types max.)																																								
Recording device	Selectable from internal storage of main unit, USB memory or SD card																																													
Data file	Number of storable data: 9990 (max.) DAT, TXT, BMP, TRC (Data can be saved simultaneously in four formats. (Data storage in TXT, BMP, and TRC formats can be selected optionally))																																													
Panel condition memory	Memorizes and recalls measurement conditions. (50 types max.)																																													
<p>6. Interface</p> <table border="1"> <tr> <th colspan="2">USB</th> </tr> <tr> <td>Number of ports</td> <td>2</td> </tr> <tr> <td></td> <td>USB 3.0 USB memory, keyboards, wireless LAN module**3</td> </tr> <tr> <th colspan="2">SD card</th> </tr> <tr> <td>Number of ports</td> <td>1</td> </tr> <tr> <td></td> <td>Supports SD/SDHC/SDXC capacity: 128 GB</td> </tr> <tr> <th colspan="2">LAN</th> </tr> <tr> <td>Number of ports</td> <td>1</td> </tr> <tr> <td></td> <td>10BASE-T/100BASE-TX/1000BASE-T Remote desktop, external control, file sharing (internal storage)</td> </tr> <tr> <th colspan="2">RS-232C</th> </tr> <tr> <td>Number of ports</td> <td>1</td> </tr> <tr> <td>Baud rate</td> <td>1,200 to 115,200 bps</td> </tr> </table>	USB		Number of ports	2		USB 3.0 USB memory, keyboards, wireless LAN module**3	SD card		Number of ports	1		Supports SD/SDHC/SDXC capacity: 128 GB	LAN		Number of ports	1		10BASE-T/100BASE-TX/1000BASE-T Remote desktop, external control, file sharing (internal storage)	RS-232C		Number of ports	1	Baud rate	1,200 to 115,200 bps																						
USB																																														
Number of ports	2																																													
	USB 3.0 USB memory, keyboards, wireless LAN module**3																																													
SD card																																														
Number of ports	1																																													
	Supports SD/SDHC/SDXC capacity: 128 GB																																													
LAN																																														
Number of ports	1																																													
	10BASE-T/100BASE-TX/1000BASE-T Remote desktop, external control, file sharing (internal storage)																																													
RS-232C																																														
Number of ports	1																																													
Baud rate	1,200 to 115,200 bps																																													
<p>7. General Specifications</p> <table border="1"> <tr> <td>Power requirement</td> <td>16 VDC, 3.3 A</td> </tr> <tr> <td>AC adapter</td> <td>Power requirement 100 to 240 VAC, 50/60 Hz Power consumption 65 VA or less 150 VA or less (When CF-0478A Power Source Backup Function is installed and charging battery)</td> </tr> <tr> <td>Operating temperature range</td> <td>0 to 40 °C (Humidity 20 to 80 %RH, with no condensation)</td> </tr> <tr> <td>Storage temperature range</td> <td>-10 to +50 °C (Humidity 20 to 80 %RH, with no condensation)</td> </tr> <tr> <td>Outer dimensions</td> <td>220 (W) × 185 (H) × 220 (D) mm (Excluding handle, stand, and protruded section)</td> </tr> <tr> <td>Weight</td> <td>Without option Approx. 2.8 kg With options Approx. 3.3 kg (When CF-0473A Amplitude Modulation Component Extraction Function and CF-0478A Power Source Backup Function are installed, including battery pack)</td> </tr> <tr> <td>Main unit cooling</td> <td>Naturally air cooling (Fanless)</td> </tr> <tr> <td>Conforming standards</td> <td>CE marking</td> </tr> </table>	Power requirement	16 VDC, 3.3 A	AC adapter	Power requirement 100 to 240 VAC, 50/60 Hz Power consumption 65 VA or less 150 VA or less (When CF-0478A Power Source Backup Function is installed and charging battery)	Operating temperature range	0 to 40 °C (Humidity 20 to 80 %RH, with no condensation)	Storage temperature range	-10 to +50 °C (Humidity 20 to 80 %RH, with no condensation)	Outer dimensions	220 (W) × 185 (H) × 220 (D) mm (Excluding handle, stand, and protruded section)	Weight	Without option Approx. 2.8 kg With options Approx. 3.3 kg (When CF-0473A Amplitude Modulation Component Extraction Function and CF-0478A Power Source Backup Function are installed, including battery pack)	Main unit cooling	Naturally air cooling (Fanless)	Conforming standards	CE marking																														
Power requirement	16 VDC, 3.3 A																																													
AC adapter	Power requirement 100 to 240 VAC, 50/60 Hz Power consumption 65 VA or less 150 VA or less (When CF-0478A Power Source Backup Function is installed and charging battery)																																													
Operating temperature range	0 to 40 °C (Humidity 20 to 80 %RH, with no condensation)																																													
Storage temperature range	-10 to +50 °C (Humidity 20 to 80 %RH, with no condensation)																																													
Outer dimensions	220 (W) × 185 (H) × 220 (D) mm (Excluding handle, stand, and protruded section)																																													
Weight	Without option Approx. 2.8 kg With options Approx. 3.3 kg (When CF-0473A Amplitude Modulation Component Extraction Function and CF-0478A Power Source Backup Function are installed, including battery pack)																																													
Main unit cooling	Naturally air cooling (Fanless)																																													
Conforming standards	CE marking																																													
<p>Accessories</p> <table border="1"> <tr> <td>AC adapter</td> <td>×1 (PS-P20023E, power cable)</td> </tr> <tr> <td>Instruction manual</td> <td>×1</td> </tr> <tr> <td>CD-ROM</td> <td>×1 (Reference guide, utility, DLL for external control, etc.)</td> </tr> <tr> <td>SD card</td> <td>×1 (Exclusive for updates, 512 MB)</td> </tr> <tr> <td>Connectors for terminal blocks (3 kinds)</td> <td>FK-MC 0,5/10-ST-2,5 ×1, FK-MC 0,5/8-ST-2,5 ×1, FK-MC 0,5/6-ST-2,5 ×1</td> </tr> <tr> <td>Ferrite core</td> <td>×1 (E045R301334, made by SEIWA ELECTRIC MFG. CO.,LTD.)</td> </tr> </table>	AC adapter	×1 (PS-P20023E, power cable)	Instruction manual	×1	CD-ROM	×1 (Reference guide, utility, DLL for external control, etc.)	SD card	×1 (Exclusive for updates, 512 MB)	Connectors for terminal blocks (3 kinds)	FK-MC 0,5/10-ST-2,5 ×1, FK-MC 0,5/8-ST-2,5 ×1, FK-MC 0,5/6-ST-2,5 ×1	Ferrite core	×1 (E045R301334, made by SEIWA ELECTRIC MFG. CO.,LTD.)																																		
AC adapter	×1 (PS-P20023E, power cable)																																													
Instruction manual	×1																																													
CD-ROM	×1 (Reference guide, utility, DLL for external control, etc.)																																													
SD card	×1 (Exclusive for updates, 512 MB)																																													
Connectors for terminal blocks (3 kinds)	FK-MC 0,5/10-ST-2,5 ×1, FK-MC 0,5/8-ST-2,5 ×1, FK-MC 0,5/6-ST-2,5 ×1																																													
Ferrite core	×1 (E045R301334, made by SEIWA ELECTRIC MFG. CO.,LTD.)																																													
<p>Optional Functions CF-0473A Amplitude Modulation Component Extraction Function (Bandpass Envelop Monitoring Function)</p> <table border="1"> <tr> <th colspan="2">Analog filter</th> </tr> <tr> <td>High-pass filter (HPF)</td> <td>Cut-off frequency (variable) 50 Hz to 10 kHz (-24 dB/oct)</td> </tr> <tr> <td>Low-pass filter (LPF)</td> <td>Cut-off frequency (variable) 50 Hz to 10 kHz (-24 dB/oct)</td> </tr> <tr> <td>Envelope filter</td> <td>1 kHz low-pass filter method</td> </tr> <tr> <th colspan="2">Headphone output</th> </tr> <tr> <td>Number of output connectors</td> <td>1</td> </tr> <tr> <td>Maximum output</td> <td>15 mW</td> </tr> <tr> <td>(at load resistance 24 Ω)</td> <td></td> </tr> <tr> <td>Output impedance</td> <td>10 Ω unbalance</td> </tr> <tr> <td>Output connector type</td> <td>Stereo mini-jack φ3.5 mm (L and R same signal output)</td> </tr> <tr> <th colspan="2">Accessory</th> </tr> <tr> <td>Ferrite core</td> <td>×1 (E045R200932, made by SEIWA ELECTRIC MFG. CO.,LTD.)</td> </tr> </table>	Analog filter		High-pass filter (HPF)	Cut-off frequency (variable) 50 Hz to 10 kHz (-24 dB/oct)	Low-pass filter (LPF)	Cut-off frequency (variable) 50 Hz to 10 kHz (-24 dB/oct)	Envelope filter	1 kHz low-pass filter method	Headphone output		Number of output connectors	1	Maximum output	15 mW	(at load resistance 24 Ω)		Output impedance	10 Ω unbalance	Output connector type	Stereo mini-jack φ3.5 mm (L and R same signal output)	Accessory		Ferrite core	×1 (E045R200932, made by SEIWA ELECTRIC MFG. CO.,LTD.)																						
Analog filter																																														
High-pass filter (HPF)	Cut-off frequency (variable) 50 Hz to 10 kHz (-24 dB/oct)																																													
Low-pass filter (LPF)	Cut-off frequency (variable) 50 Hz to 10 kHz (-24 dB/oct)																																													
Envelope filter	1 kHz low-pass filter method																																													
Headphone output																																														
Number of output connectors	1																																													
Maximum output	15 mW																																													
(at load resistance 24 Ω)																																														
Output impedance	10 Ω unbalance																																													
Output connector type	Stereo mini-jack φ3.5 mm (L and R same signal output)																																													
Accessory																																														
Ferrite core	×1 (E045R200932, made by SEIWA ELECTRIC MFG. CO.,LTD.)																																													
<p>CF-0478A Power Source Backup Function</p> <table border="1"> <tr> <td>Battery</td> <td>Lithium ion secondary battery mounted in main unit (detachable)</td> </tr> <tr> <td>Charging time that the Power Source Backup Function becomes available</td> <td>Approx. 10 to 30 minutes (At battery level 0 %, surrounding temperature range +10 °C to +35 °C)</td> </tr> <tr> <td>Battery replacing intervals</td> <td>The battery can be charged only when the main unit is on. Approx. 2 years **</td> </tr> </table>	Battery	Lithium ion secondary battery mounted in main unit (detachable)	Charging time that the Power Source Backup Function becomes available	Approx. 10 to 30 minutes (At battery level 0 %, surrounding temperature range +10 °C to +35 °C)	Battery replacing intervals	The battery can be charged only when the main unit is on. Approx. 2 years **																																								
Battery	Lithium ion secondary battery mounted in main unit (detachable)																																													
Charging time that the Power Source Backup Function becomes available	Approx. 10 to 30 minutes (At battery level 0 %, surrounding temperature range +10 °C to +35 °C)																																													
Battery replacing intervals	The battery can be charged only when the main unit is on. Approx. 2 years **																																													
<p>Accessory</p> <table border="1"> <tr> <td>Battery</td> <td>×1</td> </tr> </table>	Battery	×1																																												
Battery	×1																																													
<p>*1 If a TEDS supported sensor made by other companies is used, TEDS information may not be read according to the type of a TEDS chip included in a sensor.</p> <p>** If you are considering the purchase of a TEDS sensor made by other companies, please consult to the manufacturer or dealer of the TEDS sensor, and perform the operation check.</p> <p>** When you want to use a TEDS sensor you already have with the TEDS supported measurement instruments made by Ono Sokki, please perform the operation check with a demonstration product of Ono Sokki.</p> <p>** The TFT color LCD is created by the full use of advanced technology. However, the pixels (dots) of non-lighting or always lighting occasionally exist in the display. (The ratio of the number of effective dots: 99.999 % or more.) Also, unevenness of the color or brightness may be visible depending on the viewing angle or the temperature change. This is not a product failure, so please note that return or exchange of the product cannot be accepted.</p> <p>** Please refer to P8 "Recommended product".</p> <p>** The battery replacing intervals may be shorter than the above depending on the operating and storage conditions.</p>																																														

System Configurations

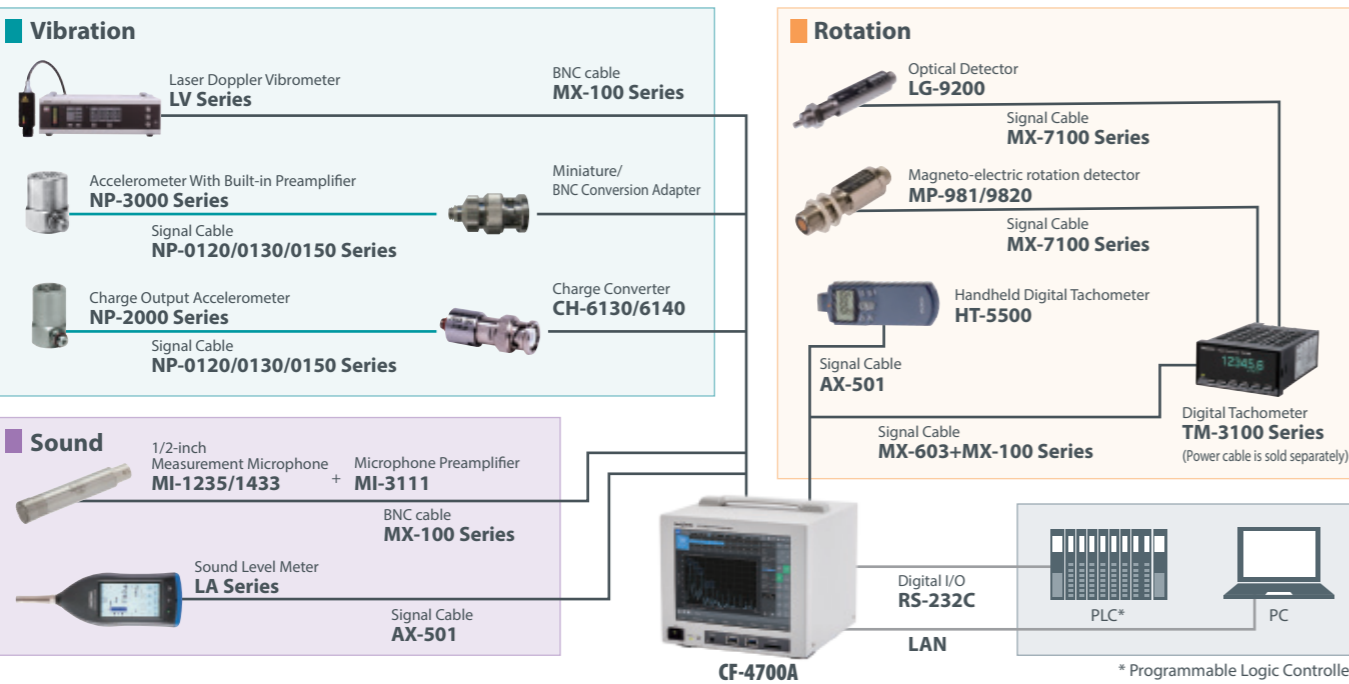

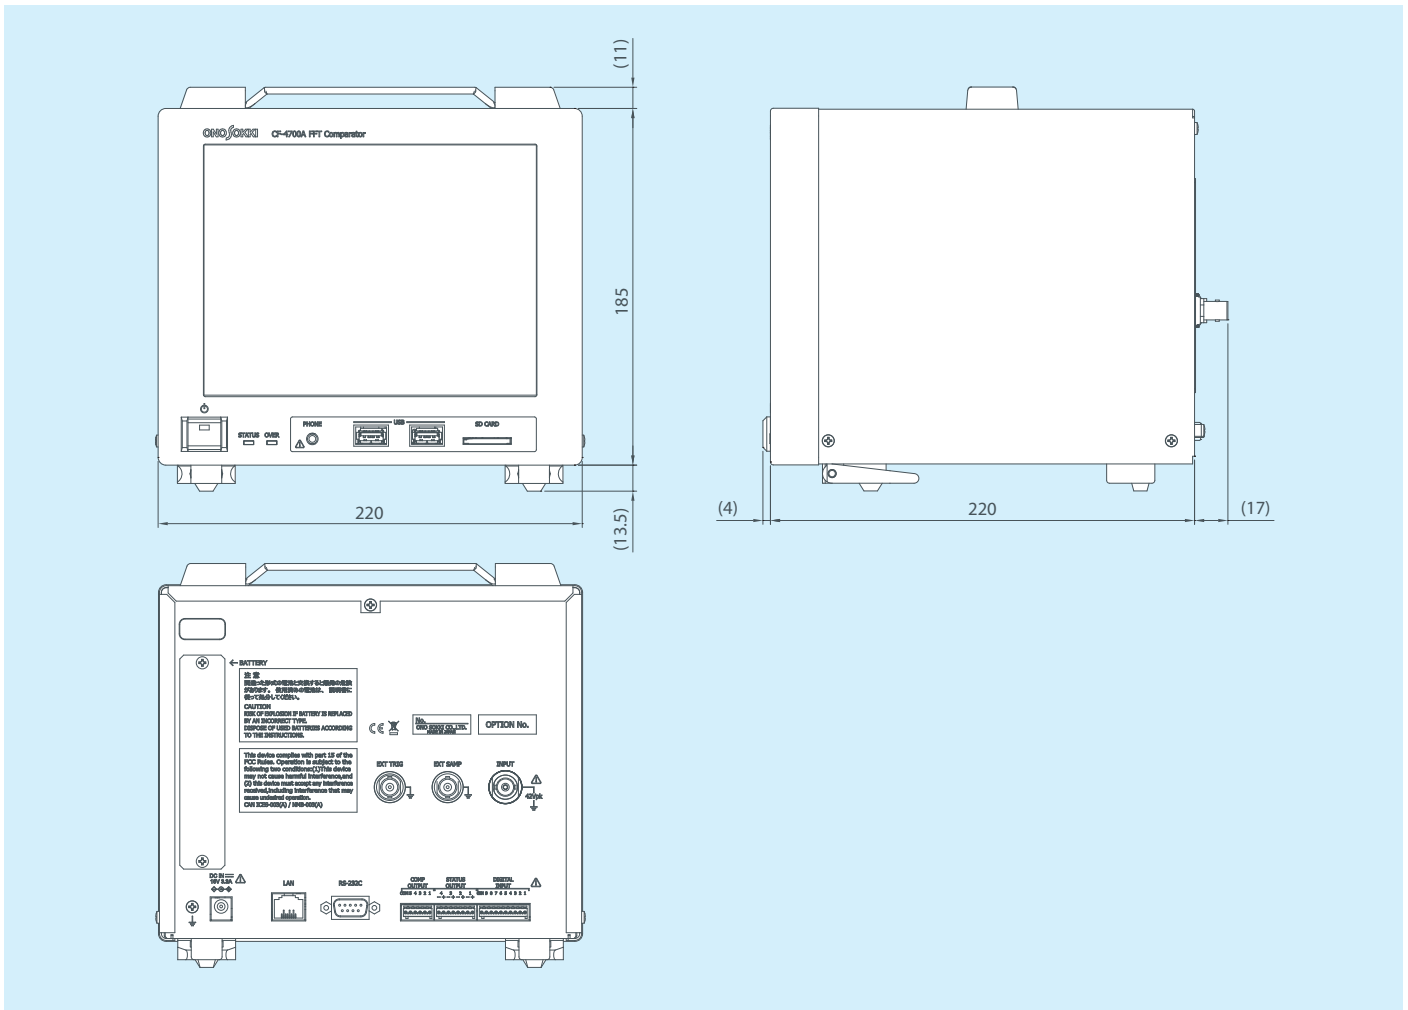

Main unit

Model name	Product name
CF-4700A	FFT Comparator

Option

Model name	Product name
CF-0471	Tracking Function
CF-0472	Shape Comparator Function
CF-0473A*	Amplitude Modulation Component Extraction Function (Band pass filter, Envelope and Monitor Function)
CF-0478A*	Power Source Backup Function

* If adding the CF-0473A and CF-0478A after delivery, additional fee will be required.

Accessory

Model name	Product name
CF-0470AJ	Reference guide (Japanese)
CF-0470AE	Reference guide (English)
—	Security software

Recommended Product

Model name	Product name
TL-WN725N	Wireless LAN adapter

*Please refer to our website for the latest information on recommended SD cards.

*Microsoft® Windows® are registered trademarks of Microsoft Corporation in the United States and other countries.
Other product names are trademarks or registered trademarks of each individual company. The copyrights are reserved by each individual company.

ONOSOKKI

WORLDWIDE ONO SOKKI CO., LTD.
3-9-3 Shin-Yokohama, Kohoku-ku, Yokohama, 222-8507, Japan
Phone : +81-45-476-9725 Fax : +81-45-476-9726
E-mail : overseas@onosokki.co.jp

* Outer appearance and specifications are subject to change without prior notice.
URL : <https://www.onosokki.co.jp/English/english.htm>

U.S.A.
Ono Sokki Technology Inc.
2171 Executive Drive, Suite 400
Addison, IL, 60101, U.S.A.
Phone : +1-630-627-9700
Fax : +1-630-627-0004
E-mail : info@onosokki.net
<https://www.onosokki.net>

THAILAND
Ono Sokki (Thailand) Co., Ltd.
1/293-4 Moo.9 T.Bangphud
A.Pakred
Nonthaburi 11120, Thailand
Phone : +66-2-584-6735
Fax : +66-2-584-6740
E-mail : sales@onosokki.co.th

INDIA
Ono Sokki India Private Ltd.
Plot No.20, Ground Floor, Sector-3,
IMT Manesar Gurgaon-122050,
Haryana, INDIA
Phone : +91-124-421-1807
Fax : +91-124-421-1809
E-mail : osid@onosokki.co.in

P.R.CHINA
Ono Sokki Shanghai Technology Co., Ltd.
Room 506, No.47 Zhengyi Road, Yangpu
District, Shanghai, 200433, P.R.C.
Phone : +86-21-6503-2656
Fax : +86-21-6506-0327
E-mail : admin@shonosokki.com