**Handheld Digital Tachometers Series** HT-3200/4200 ONOSOKKI ONOSOKKI



The HT-3200 offers a Lo measurement range that starts from 0.5 r/min.

The circumferential ring and contact tip for rotation measurement can be stored in the back-side pocket of the main body.

- Capable of measurement from a low speed at 0.5 r/min (when low range selection) up to a high speed at 10,000 r/min (when high range selection).
- A large-size display device (10.5-mm character height) is incorporated into the compact, lightweight device.
- Built-in convenient memory function for easy confirmation of the measured results
- Dual-purpose type—replacing the contact tip with the circumferential ring enables
- circumferential measurement
- Equipped with a storage pocket for the circumferential ring
- The latest measurement value continues to be displayed for approximately 30 seconds even after the power has been switched
- Battery replacement time indicator is provided.








The HT-4200 is a compact, non-contact type handheld digital tachometer.

Affix one of the reflective marks to the rotating surface of the target measurement object, and then aim the red visible ray at the mark. If multiple marks are affixed to the target of measurement object, measurement can be performed at a lower speed.

- The 5-digit display enables wide-ranging measurement from 4 r/min (when multiple reflective marks are used.) to 50,000 r/min (when single reflective mark is used.)
- A large-size display device (10.5-mm character height) is incorporated into the compact, lightweight device which can be easily slipped into your shirt pocket.
- Built-in convenient memory function for easy confirmation of the measured results
- •Even shiny shafts can be measured by using the reflective marks provided with the device.
- Measurement can be performed over a wide range from 30 r/min to 50,000 r/min, in 1-r/min resolution (when one reflective mark is used).
- Measurement can be performed safely at a distance ranging from 20 to 300 mm between the detection unit and the target measurement surface (the reflective mark surface).
- The latest measurement value continues to be displayed for approximately 30 seconds even after the power has been switched off.
- Battery replacement time indicator is provided.

Specifications	
Detection method	Contact method
Display	5-digit LCD (10.5-mm character height)
Measurement update time	1-s automatic update (2-s update for Lo range: 0.5 to 1.0 r/min) 1-s automatic update (2-s update for Hi range: 5 to 10 r/min)
Rotation speed measurement range	0.5 to 10,000 r/min Lo: 0.5 to 2,000.0 r/min Hi: 5 to 10,000 r/min
Circumferential speed measurement range	When the KS-200 circumferential ring (provided) is used: 0.05 to 1000.0 m/min When the KS-100 circumferential ring (option) is used: 0.5 to 10,000 mm/s
Measurement accuracy	Low (Lo) range: 0.5 to 1249.9 r/min speeds
Memory function	10 data can be memorized.
Data hold function	Auto power off when 30 seconds have elapsed after the end of measurement.
Low battery indication	The "LOW" mark is displayed when the battery voltage falls below 3.3 V.
Over-range display	An "ERROR" mark is displayed.
Power source	Three AAA-type batteries (1.5 V) Continuous measurement time: Approx. 20 hours (when alkaline batteries are used, at 20°C)
Operating temperature	0 to +40°C
Storage temperature	-20 to +55°C
Outer dimensions	63 (W) x 172 (L) x 38.5 (D) mm
Weight (including batteries)	Approx. 200 g
Accessories	Contact tip for rotation measurement (KS-300) Circumferential ring (KS-200, m/min) User's manual  2 pieces (One tip can be stored in the back side pocket main body) 1 piece (can be stored in the back-side pocket of main body) 1 copy

Specifications	
Detection method	Red visible ray photoelectric reflection method
Detection distance	20 to 300 mm
Display	5-digit LCD (10.5-mm character height), fixed measurement unit (r/min)
Measurement update time	1-s automatic update (2-s update when the circumferential speed is lower than 60/number of reflective marks r/min)
Measurement range	Measurement resolution: 1 r/min The affixing of multiple reflective marks enables measurement of lower rotation speeds.
	Measurement speed Number of reflective marks
	30 to 50,000 r/min 1
	15 to 25,000 r/min2
	10 to 16,667 r/min 3
	8 to 12,500 r/min 4 5 to 8,333 r/min 6
	3 to 8,333 //min
	4 to 0,230 mini
Measurement accuracy (when one reflective mark is used)	30 to 12,499 r/min speeds Within ±1 r/min 12,500 to 24,999 r/min speeds Within ±2 r/min 25,000 to 50,000 r/min speeds Within ±4 r/min
Measurement of the number of pulses	The number of reflective marks used can be specified in order to perform measurement from lower rotation speeds. Specifiable values: 1, 2, 3, 4, 6, 8 P/R
Memory function	10 data can be memorized.
Data hold function	Auto power off when 30 seconds have elapsed after the end of measurement.
Low battery indication	The "LOW" mark is displayed when the battery voltage falls below 3.3 V.
Over-range display	An "ERROR" mark is displayed.
Power source	Three AAA-type batteries (1.5 V), Continuous measurement time: Approx. 20 hours (when alkaline batteries are used, at 20°C)
Operating temperature	0 to +40°C
Storage temperature	-10 to +55°C
Outer dimensions	62 (W) x 129 (L) x 26.4 (D) mm
Weight (including batteries)	Approx. 130 g
Accessories	Reflective marks 1 sheet (25 marks) User's manual 1 copy

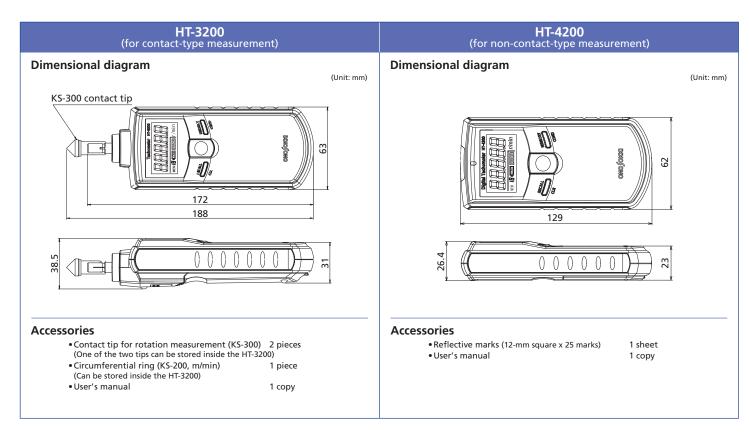





### WORLDWIDE ONO SOKKI CO., LTD.

1-16-1 Hakusan, Midori-ku, Yokohama 226-8507, Japan Phone: +81-45-935-3918 Fax: +81-45-935-3808

E-mail: overseas@onosokki.co.jp

\*Outer appearance and specifications are subject to change without prior notice. URL: https://www.onosokki.co.jp/English/english.htm

## U.S.A.

Ono Sokki Technology Inc. 2171 Executive Drive, Suite 400,

Addison, IL. 60101, U.S.A. Phone: +1-630-627-9700 Fax : +1-630-627-0004 E-mail : info@onosokki.net http://www.onosokki.net

## **THAILAND**

Ono Sokki (Thailand) Co., Ltd. 1/293-4 Moo.9 T.Bangphud A.Pakkred.

Nonthaburi 11120, Thailand Phone: +66-2-584-6735 Fax: +66-2-584-6740 Fax E-mail: sales@onosokki.co.th

# **INDIA**

Ono Sokki India Private Ltd. Plot No.20, Ground Floor, Sector-3, IMT Manesar Gurgaon-122050,

Haryana, INDIA

Phone: +91-124-421-1807 Fax: +91-124-421-1809 Fax E-mail: osid@onosokki.co.in

## P.R.CHINA

Ono Sokki Shanghai Technology Co., Ltd. Room 506, No.47 Zhengyi Road, Yangpu District, Shanghai, 200433, P.R.C.

Phone: +86-21-6503-2656 Fax : +86-21-6506-0327 E-mail: admin@shonosokki.com